


Absolute encoders - bus interfaces

Encoder with through hollow shaft max. $\varnothing 70$ mm

Single and multiturn 13 bit ST / 12 or 16 bit MT

SSI / Profibus / CANopen® / DeviceNet

HMG 161

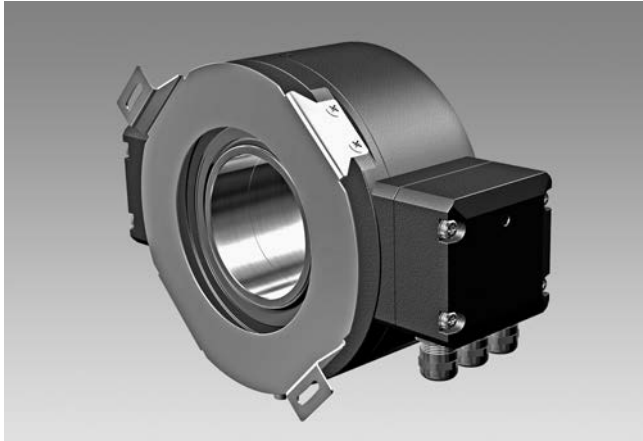

HMG 161

Technical data - electrical ratings

Voltage supply	9...30 VDC
Consumption w/o load	≤100 mA (per interface SSI) ≤250 mA (per interface bus)
Initializing time	≤200 ms after power on
Interfaces	SSI, Profibus-DPV0, CANopen®, DeviceNet
Function	Multiturn
Transmission rate	9.6...12000 kBaud (Profibus) 10...1000 kBaud (CANopen®) 125...500 kBaud (DeviceNet)
Profile conformity	Profibus-DPV0 CANopen® CiA DSP 406 V 3.0 Device Profile Encoder V 1.0
Device address	Rotary switches in bus cover
Steps per turn	8192 / 13 bit
Number of turns	≤65536 / 16 bit
Additional outputs	Square-wave TTL (RS422) Square-wave HTL
Incremental output	2048 pulses per revolution
Sensing method	Optical
Code	Gray (version SSI)
Code sequence	CW default
Inputs	SSI clock (version SSI)
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Programmable parameters	Depending on the selected absolute interface
Diagnostic function	Position or parameter error
Status indicator	DUO-LED integrated in bus cover
Approvals	CE, UL approval / E256710

Features

- Multiturn / SSI / Profibus / CANopen® / DeviceNet
- Optical sensing method
- Singleturn 13 bit, multiturn 12 bit / 16 bit
- Through hollow shaft $\varnothing 38...70$ mm
- Multiturn sensing with microGen technologie, without gear or battery
- Special protection against corrosion

Optional

- Additional incremental output (TTL / HTL)
- Insulated bearing

Technical data - mechanical design

Size (flange)	$\varnothing 160$ mm
Shaft type	$\varnothing 38...70$ mm (through hollow shaft)
Protection DIN EN 60529	IP 56
Operating speed	≤3500 rpm (mechanical)
Operating torque typ.	15 Ncm
Rotor moment of inertia	28.5 kgcm ² ($\varnothing 50$)
Admitted shaft load	≤350 N axial ≤500 N radial
Materials	Housing: aluminium Shaft: stainless steel
Operating temperature	-20...+85 °C
Resistance	IEC 60068-2-6 Vibration 10 g, 10-2000 Hz IEC 60068-2-27 Shock 200 g, 6 ms
Explosion protection	II 3 G Ex nA IIC T4 Gc (gas) II 3 D Ex tc IIIB T135°C Dc (dust)
Weight approx.	5 - 6.4 kg (Depending on version)
Connection	Bus cover Connecting terminal (SSI/ incremental)

Absolute encoders - bus interfaces

Encoder with through hollow shaft max. $\varnothing 70$ mm

Single and multiturn 13 bit ST / 12 or 16 bit MT

SSI / Profibus / CANopen® / DeviceNet

HMG 161

Part number

HMG161 [][][][][]

- Shaft diameter
- 38H7 Through hollow shaft $\varnothing 38$ mm
- 40H7 Through hollow shaft $\varnothing 40$ mm
- 42H7 Through hollow shaft $\varnothing 42$ mm
- 50H7 Through hollow shaft $\varnothing 50$ mm
- 55H7 Through hollow shaft $\varnothing 55$ mm
- 60H7 Through hollow shaft $\varnothing 60$ mm
- 65H7 Through hollow shaft $\varnothing 65$ mm
- 70H7 Through hollow shaft $\varnothing 70$ mm
- Additional output
- Z0 Without
- T2048 TTL level, 2048 pulses
- H2048 HTL level, 2048 pulses
- Absolute share
- 13 13 bit singleturn
- 25 13 bit singleturn + 12 bit multiturn (only S version)
- 29 13 bit singleturn + 16 bit multiturn
- Interface/interfaces
- S SSI
- P Profibus
- C CANopen®
- D DeviceNet

Accessories

Connectors and cables

HEK 8 Sensor cable for encoders

Diagnostic accessories

HENQ 1100 Analyzer for encoders

Absolute encoders - bus interfaces

Encoder with through hollow shaft max. $\varnothing 70$ mm


Single and multiturn 13 bit ST / 12 or 16 bit MT

SSI / Profibus / CANopen® / DeviceNet

HMG 161

Terminal assignment - Profibus

View A - Connecting terminal in cover

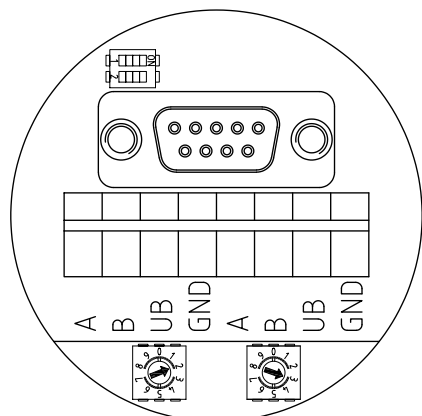

Terminal significance - Profibus

A	Negative serial data transmission, pair 1 and pair 2
B	Positive serial data transmission, pair 1 and pair 2
UB	Voltage supply 9...30 VDC
GND	Ground connection for UB


Terminals with the same label are internally connected.

Features - Profibus

Protocol	Profibus DP V0
Profibus features	Device Class 1 and 2
Data Exch. functions	Input: Position value Output: Preset value
Preset value	The „Preset“ parameter can be used to set the encoder to a predefined value that corresponds to a specific axis position of the system.
Parameter functions	Rotating direction: The relationship between the rotating direction and rising or falling output code values can be set in the operating parameter. Scaling: The parameter values set the number of steps per turn and the overall resolution.
Diagnostic	The encoder supports the following error messages: - Position error
Default settings	User address 00

Terminal assignment - CANopen®

View A - Connecting terminal in cover

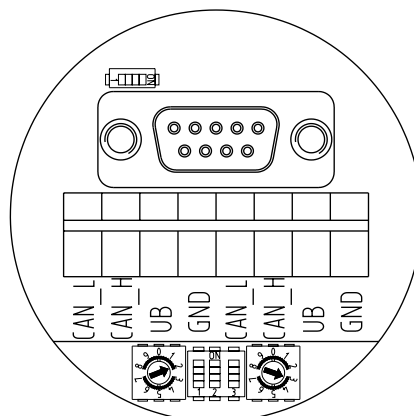

Terminal significance - CANopen®

CAN_L	CAN Bus signal (dominant low)
CAN_H	CAN Bus signal (dominant high)
UB	Voltage supply 9...30 VDC
GND	Ground connection for UB

Terminals with the same label are internally connected.

Features - CANopen®

Protocol	CANopen®
CANopen® features	Device class 2 CAN 2.0B
Device profile	CANopen® CiA DSP 406, V 3.0
Operation modes	Polling mode (asynch, via SDO) Cyclic mode (asynch-cyclic) Synch mode (synch-cyclic) Acyclic mode (synch-acyclic)
Diagnostic	The encoder supports the following error messages: - Position error
Default settings	User address 00

Absolute encoders - bus interfaces

Encoder with through hollow shaft max. $\varnothing 70$ mm


Single and multiturn 13 bit ST / 12 or 16 bit MT

SSI / Profibus / CANopen® / DeviceNet

HMG 161

Terminal assignment - DeviceNet

View A - Connecting terminal in cover

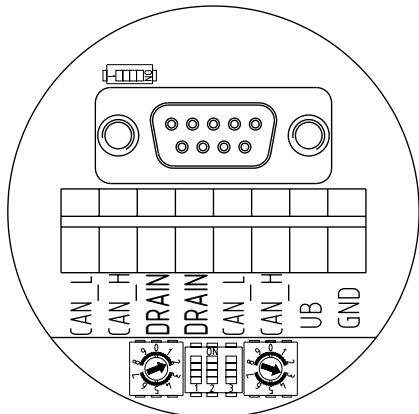

Terminal significance - DeviceNet

CAN_L	CAN bus Signal (dominant Low)
CAN_H	CAN bus Signal (dominant High)
DRAIN	Shield connection
UB	Voltage supply 9...30 VDC
GND	Ground connection relating to UB


Terminals of the same significance are internally connected and identical in their functions. Max. load on the internal terminal connections UB-UB and GND-GND is 1 A each.

Features - DeviceNet

Protocol	DeviceNet
DeviceNet features	Device Profile for Encoders V 1.0
Operating modes	I/O-Polling Cyclic Change of State
Preset value	The „Preset“ parameter can be used to set the encoder to a predefined value that corresponds to a specific axis position of the system. The offset of encoder zero point and mechanical zero point is stored in the encoder.
Parameter functions	Rotating direction: The relationship between the rotating direction and rising or falling output code values can be set in the operating parameter. Scaling: The parameter values set the number of steps per turn and the overall resolution.
Diagnostic	The encoder supports the following error warnings: - Position and parameter error
Default settings	User address 00

Terminal assignment - Incremental and/or SSI

View B - Connecting terminal

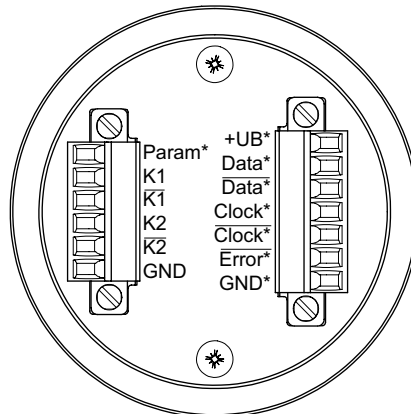

* only for SSI


View C - Option

Flange connector M23, 12-pin, male contacts, counter-clockwise

Male Assignment

Pin 1	$\overline{K2}$
Pin 2	Clock *
Pin 3	Data *
Pin 4	\overline{Data} *
Pin 5	K1
Pin 6	$\overline{K1}$
Pin 7	Param *
Pin 8	K2
Pin 9	\overline{Error} *
Pin 10	GND
Pin 11	\overline{Clock} *
Pin 12	+UB *

* only for SSI



Absolute encoders - bus interfaces


Encoder with through hollow shaft max. $\varnothing 70$ mm

Single and multiturn 13 bit ST / 12 or 16 bit MT

SSI / Profibus / CANopen® / DeviceNet

HMG 161

Data transfer

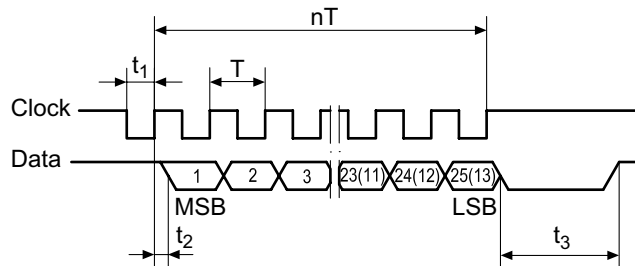

$$T = 1.25 \dots 10 \mu\text{s}$$

$$t_1 = 0.63 \dots 5 \mu\text{s}$$

$$t_2 \leq 0.4 \mu\text{s}$$


$$t_3 = 12 \dots 30 \mu\text{s}$$

$$n = \text{Number of bits}$$

$$\text{Clock frequency} = 100 \dots 800 \text{ kHz}$$

Output signals

Additional incremental signals
at positive rotating direction

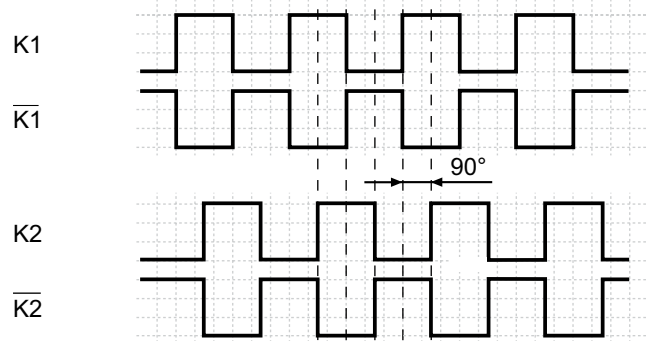

Absolute encoders - bus interfaces

Encoder with through hollow shaft max. $\varnothing 70$ mm

Single and multiturn 13 bit ST / 12 or 16 bit MT

SSI / Profibus / CANopen® / DeviceNet

HMG 161

Dimensions

