

CMGZ 480 Digital Tension Controller with CAN-BUS[®] Interface

PID Controller with 2 ms cycle time
High performance and fast reaction time

Functions parameterized via CAN-BUS[®]
Easy set-up and programming

Compact design, IP 67 Protection
Low space requirements, easy mounting

Galvanically isolated
Protected against electrical noise



● CMGZ 480 Series


The digital tension controllers CMGZ 480 can be used with all FMS force sensors. Thanks to its specific features the controller is ideally suited for fast application e.g. in stranding machines.

CMGZ 480 controllers come in rugged, resilient aluminium housings. They were designed for dependable operation in the most demanding environments. The sealed housing is rated for a protection class of IP 67.

● Functional Description

Design and functionality of the CMGZ 480 is optimised for tension control. The tension force values are fed to the controller via a fast A/D converter. Signal processing and controlling tasks are performed digitally. This results in excellent long term temperature stability and control performance. The CMGZ 480 operates on a 2 millisecond cycle time for fast reaction and high performance. Parameter setting as well as data transmission is performed via an integrated CAN-BUS[®] interface using the Open CAN CiA-DS 301 protocol.

CMGZ 480 • Block Diagram

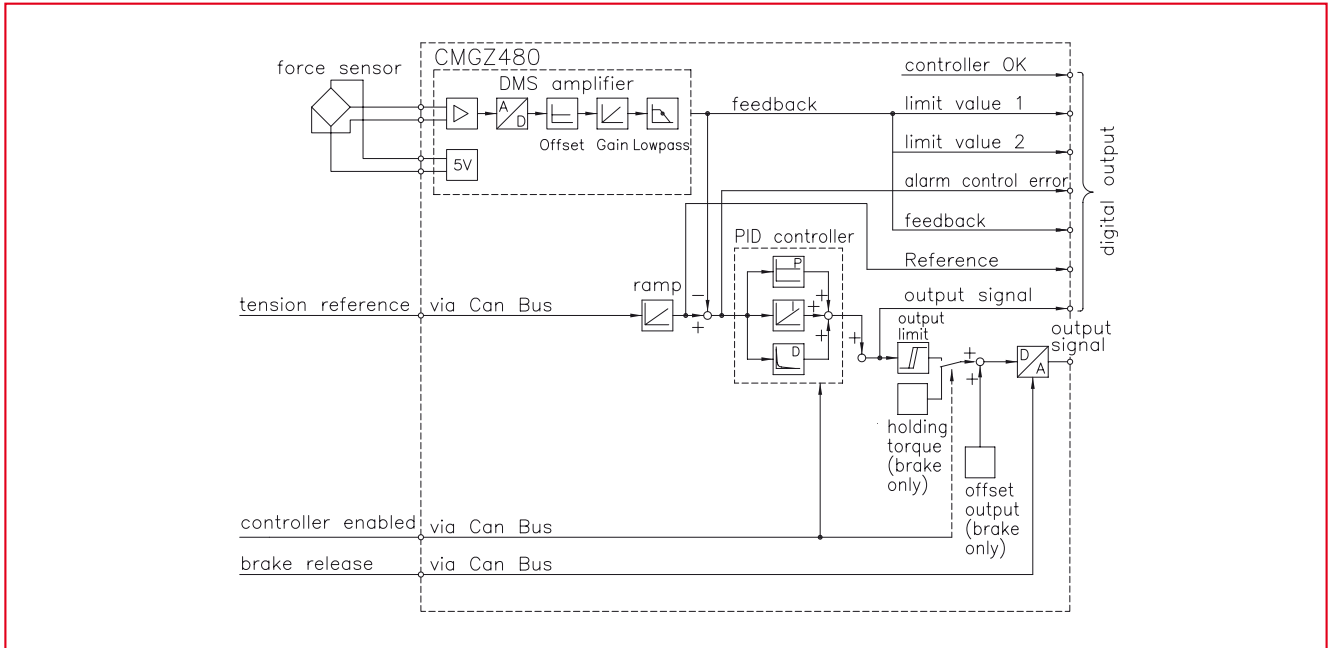

CMGZ 480 • Technical Data

Channels	1
Force sensors	2 x 350 Ω
Sensor supply voltage	5,00 VDC
Input signal	0...9 mV (max. 12.5 mV)
Resolution A/D converter	± 8192 Digit (14 Bit)
Measuring error	< 0.05 % FS
Measuring rate	2 ms
Operation	By CAN CiA-DS 301® protocol
Analogue output	0...10 V (Default) / ± 10 V
Power supply	24 VDC (18...36 VDC)
Temperature range	- 10...60 °C
Protection class	IP 67
Weight	ca. 300 g

Option:

M16 = Version with Amphenol 5-pole connector for rotating applications

Order code (Example):


CMGZ480.M16

Controller series ● ┌
 Connector option ● └

Scope of delivery:


Tension Controller, operation manual

CMGZ 480 • Dimensions in mm

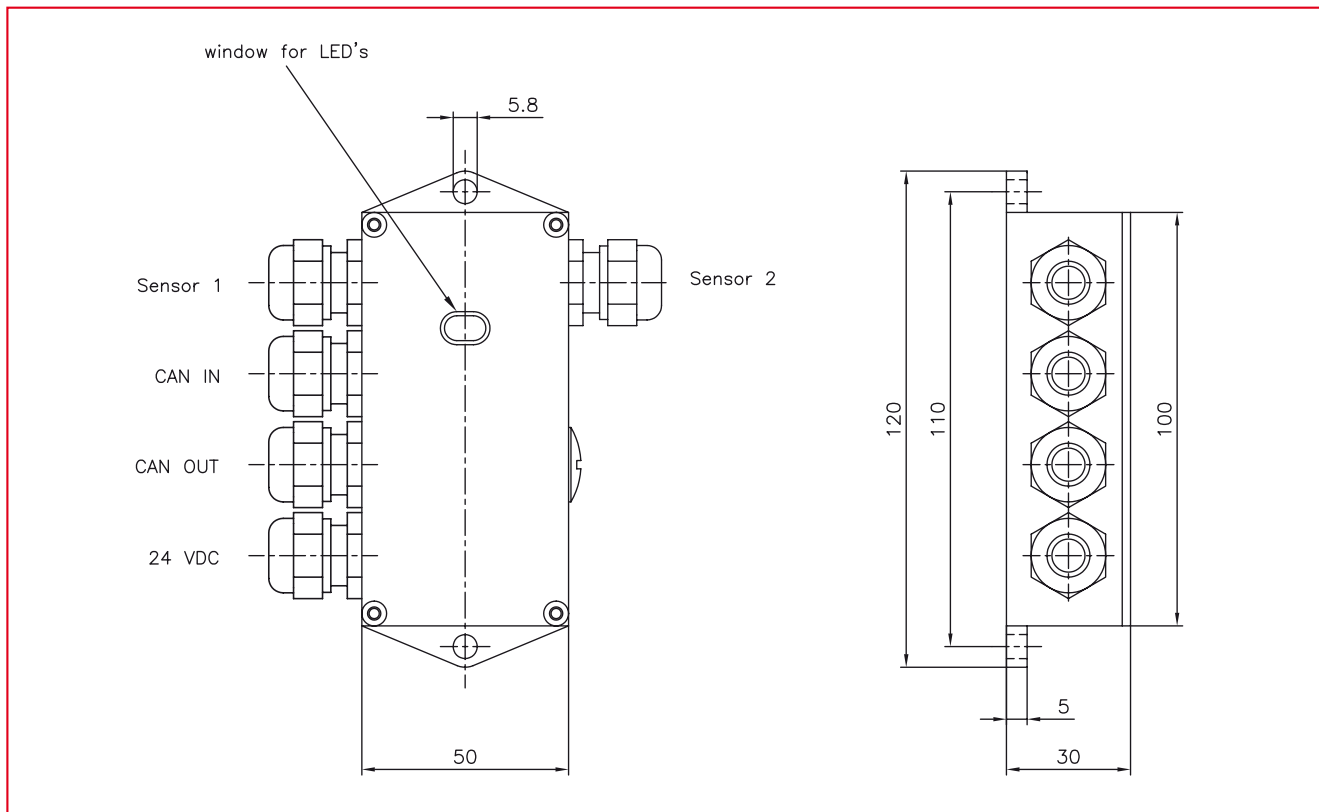

PG-Gland cable connector.

CMGZ 480.M16 • Dimensions in mm

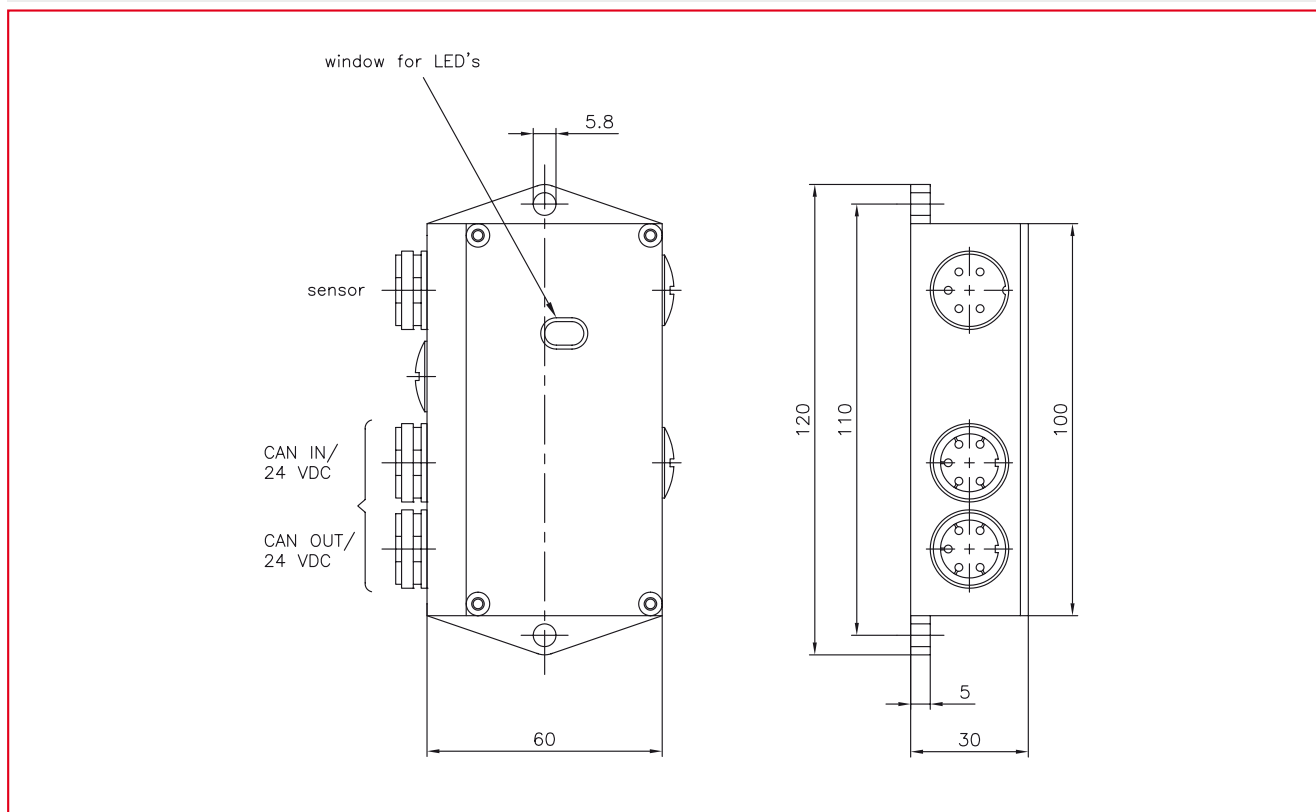

M 16 connector option. This version is specially suited for rotating applications e.g. stranding machines.

FMS' Product Portfolio and System Solutions




The product line Force Sensors provides products, solutions and related services that increase industrial productivity, energy efficiency and high quality output. Its force sensors, tension measuring rollers and pillow block based designs are of premium quality and ultra durable.



The product line Electronics facilitates tension monitoring, close loop tension control and web guiding systems. Key technologies include high-performance tension amplifiers and PID-controllers, as well as products to accurately and consistently control material position in continuously manufactured products.



The main focus of the FMS Web Guiding business is to provide customers with products and solutions for web detection and web positioning. Its steering frames, drives, controllers and material sensors provide an excellent coverage of the most important applications. The industries served include converting, printing, label processing and packaging.

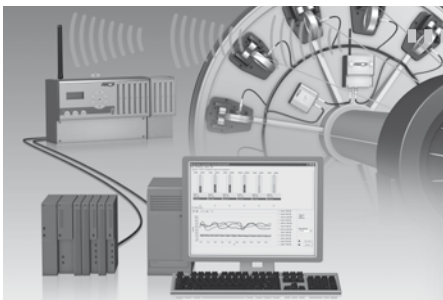

RTM (Radio Transmitted Tension Monitoring) delivers system solutions across the cable production value chain. These innovative systems utilise force measuring rollers to capture the tension of individual wires or strands, and then securely transmit this data from the rotating to the static part of the machine. The systems are designed with fully compatible components. Production rates and product quality on rotating strand-handling machinery are significantly improved.



Special Application Fields facilitates solutions in **vacuum** applications or in potentially explosive atmospheres. A sophisticated range of interface options including systems such as **PROFINET, Ethernet/IP, Profibus** and **CAN-bus** provide quick and efficient integration of FMS products into the existing communication and control infrastructure of your company.

World Headquarters:

FMS Force Measuring Systems AG
 Aspstrasse 6
 8154 Oberglatt (Switzerland)
 Phone + 41 44 852 80 80
 Fax + 41 44 850 60 06
 info@fms-technology.com

FMS USA, Inc.
 2155 Stonington Avenue
 Suite 119
 Hoffman Estates, IL 60169
 Phone + 1 847 519 4400
 Fax + 1 847 519 4401
 fmsusa@fms-technology.com

FMS UK
 Highfield, Atch Lench Road
 Church Lench
 Evesham WR 11 4UG
 Phone + 44 1386 871023
 Fax + 44 1386 871021
 fmsuk@fms-technology.com

FMS Italy
 Via Baranzate 67
 20026 Novate Milanese
 Phone + 39 02 39487035
 Fax + 39 02 39487035
 fmsit@fms-technology.com